

12.1" LCD Touch Display White Only

LED

Product Features

- 12.1" LED Backlight LCD Display
- 5 Key OSD Control Buttons
- Low Power Consumption
- No Base - Use VESA mount
- Optional Touch Screen & MSR Solution
- Adjustable Tilt stand base - not supplied
- 75x75 & 100x100 VESA Wall mount support


GM12 Specification

Specification \ Model		GM-12LiMT Touch Monitor (SVGA Model)	
DISPLAY	Screen Size	12.1"	
	Backlight	CCFL / LED	
	Aspect Ratio	4 : 3	
	Max. Resolution	800 x 600 (SVGA)	1024 x 768 (XGA)
	Viewable Size (HxV)	246 x 184.5 mm	245.76 x 184.32 mm
	Pixel Pitch (HxV)	0.3075 x 0.3075 mm	0.24 x 0.24 mm
	Brightness (Typ.)	160 cd/m ²	200 cd/m ²
	Contrast Ratio (Typ.)	300 : 1	700 : 1
	Viewing Angle (HxV)	90° / 40°	90° / 40°
	Display Color	262,144	
I/O INTERFACE	Response Time (Tr/Tf) (Typ.)	15/30 ms	
	Video Input	VGA	
	Touch Interface	N/A	
ELECTRICAL	Power Input	AC 100~240 V, 50/60 Hz	
	Power Supply	DC12V / 3A	
	Power Consumption	16W max. / Standby 2W max.	
GENERAL	Operating Condition	Temp.: 0°C ~ 50°C Hum.: 10%~85% (20%~85% for MSR)	
	Storage Condition	Temp.: -20°C ~ 60°C Hum.: 10%~85% (20%~85% for MSR)	
	Dimension (WxHxD)	302 x 288 x 160 mm	
	Net Weight	3.1 Kg (Max.) with Touch & MSR	
	Regulations	FCCB, CE, TUV/GS, ETL.ETLC	
OPTION	Touch Panel	N/A	
	Glass	Anti-Reflection Strengthen Glass	
	Mounts	VESA Stand and 75x75 mm	
	MSR	N/A	
	Cabinet Color	White or Black or Customized	

*Specifications subject to change without notice. V1.2



Function Panel

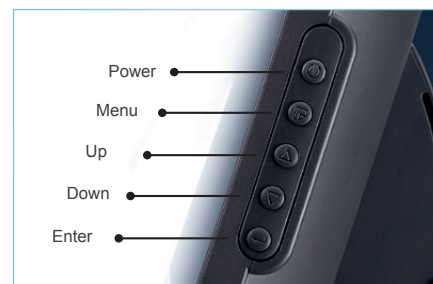

ice InfoComm
Engineering
POS & IT Suppliers

InfoComm Engineering

10 Irvine Crescent
Frankston Victoria 3199

Ph: 03 9789 3549

Fax: 03 9011 6180

<http://www.coolice.com.au/catalog/>

email: infocomm@coolice.com.au

Features and Options



Anti-Reflection
Strengthen Glass



Stand Base (0° ~ 45°)



VESA Wall Mounting
75x75mm Meet Vesa Standard